



Advantage EX Cap Frame Installation Instructions (For Elite Pro and C-Series machines)

1. Take the arms off the machine. (For the Elite Pro machine, remove the complete hoop arm stay assembly from the top of the pantograph).
2. Loosen the QS bracket thumbscrews.

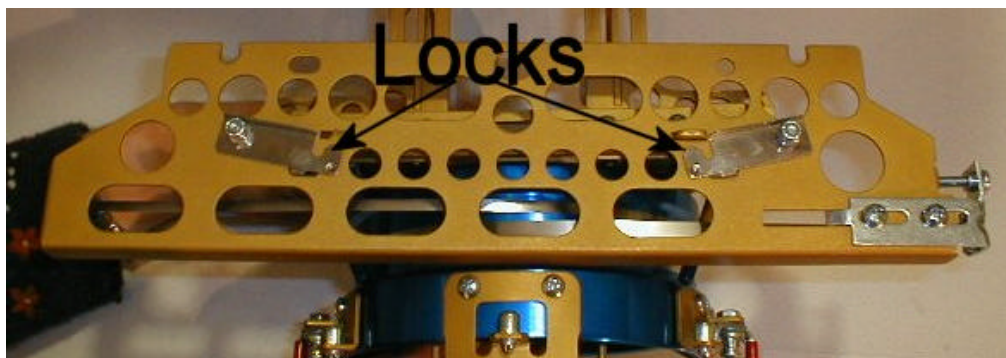


3. Release the two locks on the Advantage EX Drive unit, as shown above.
4. Slide the Drive unit over the cylinder arm.

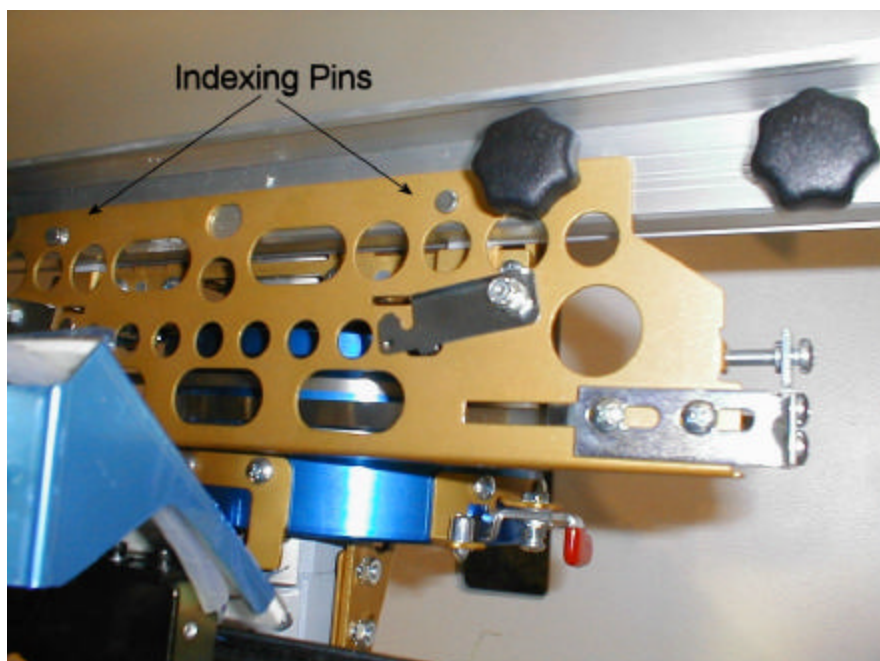

5. Lift the bracket over the pantograph and place it under the indexing pins. Tighten the knobs.

Advantage EX Cap Frame Installation Instructions (For Elite Pro and C-Series machines)

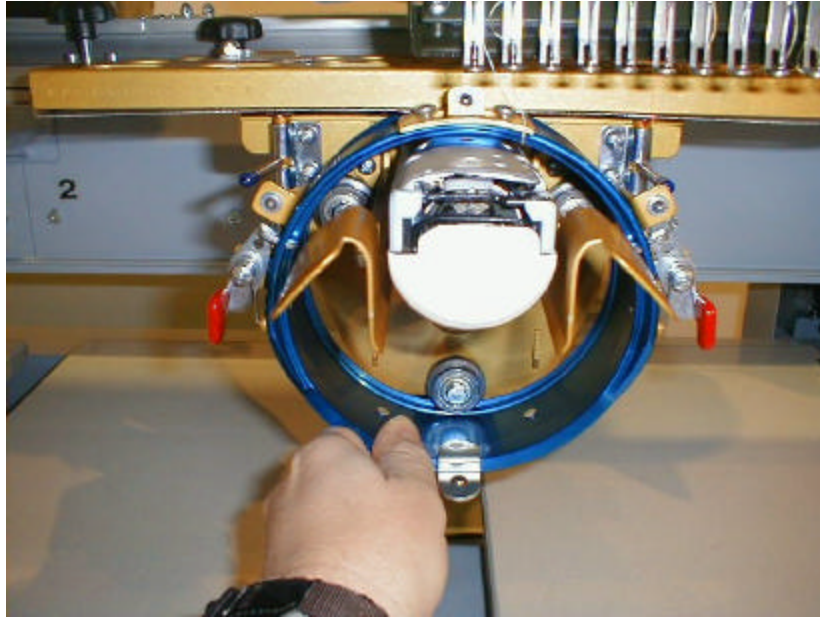


6. Pushing the cap frame drive unit from the bottom, push it all the way back until the cap frame snaps into place on the back of the pantograph.



Note: The white rollers should snap over the back of the pantograph

Top view of back of pantograph

Advantage EX Cap Frame Installation Instructions (For Elite Pro and C-Series machines)

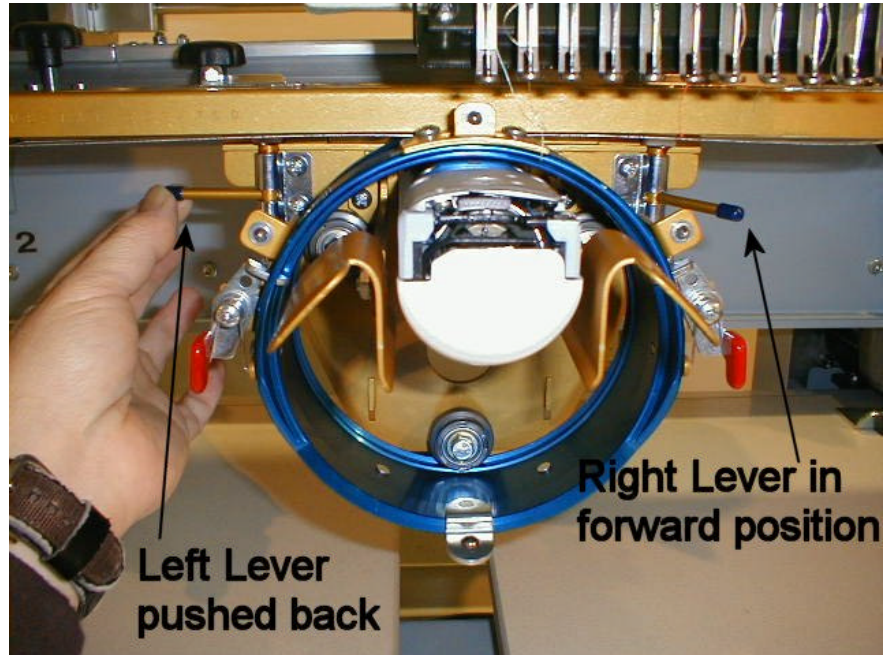

7. Push the two (left and right) cam lock levers all the way back, towards the back of the machine, as shown in the photo above.